



SL6 Sliding Door Lock and Trim

Frascio's SL6 Series lock and trim is ideal for sliding pocket and barn door applications, where space saving recessed trim is required and a retractable flush edge pull provides ergonomic convenience.

SL6 locks incorporate RC rectangular trim as a standard, providing a contemporary style that complements a wide variety of design plans.

Perfect for use in residential and hospitality applications where reliable function and elegant design are appreciated.



A valued brand of



www.FRInternational.com

1011 3rd Avenue SW • Carmel, IN 46032
317-663-0030 • 1-800-238-9711

SL6 Sliding Door Lock and Trim Hardware


Frascio's SL6 Series lock and trim is ideal for sliding pocket and barn door applications, where space saving recessed trim is required and a retractable flush edge pull provides ergonomic convenience.



Perfect for use in residential and hospitality applications where reliable function and elegant design are appreciated.

SL6 Specifications	
Case Size	3-1/4" x 6" x 19/32" (82 mm x 154 mm x 15 mm)
Face Plate	1" x 8" x 1/16" (26 mm x 203 mm x 1.5 mm)
Backset	2-1/2" (63 mm)
Door Preparation	Refer to SL6 Door Preparation Guide
Door Thickness Range	1-3/8" (35mm) to 2" (2") wood door
Deadbolt Extension	1" (25 mm) projection with expanding locking tabs; stainless steel
Edge Pull Size	1-3/16" (30 mm) x 2" (51 mm)
Strike	1-3/16" x 4-3/8" x 1/16" (30mm x 111mm x 1.5mm), with cast metal strike box

Standard finishes: 619 and 622. Other finishes available based on project specification.

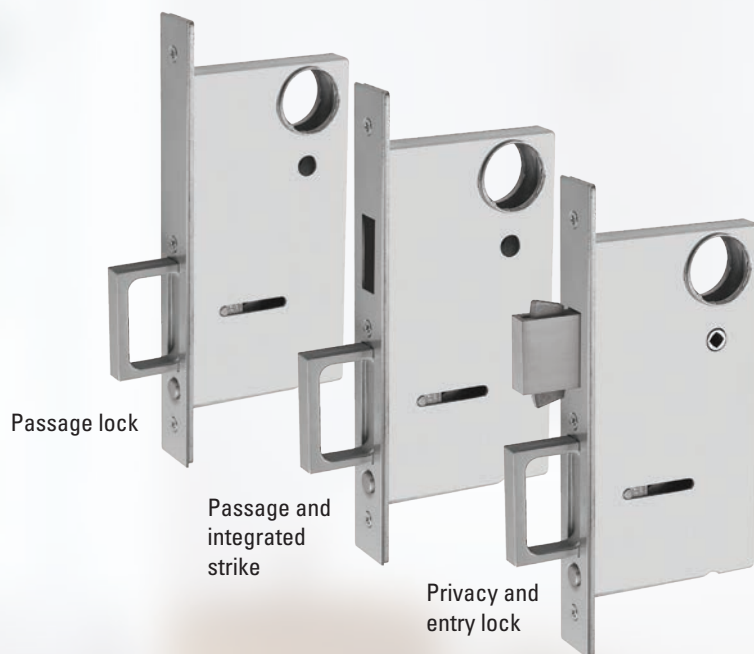

How to Specify and Order:

Privacy function SL6 sliding door lock with rectangular plate trim, in satin nickel finish, for a standard range door thickness

SL6-1	RC	619	
Function	Trim	Finish	Misc.
SL6-1	RC	619	
SL6-2	OL	622	
SL6-3	RN	Per project specification	
SL6-4	SR		
SL6-5			
SL6-6			

SL6 Recessed Trim Configurations

RC – Rectangular

7-1/2" (190 mm) x 2-3/8" (60 mm) x 1/16" (1.5mm) flange



Blank Cylinder Turnknob Coin Release

OL – Oval

7-1/2" (190 mm) x 2-3/8" (60 mm) x 7/64" (2.8mm) flange



Blank Cylinder Turnknob Coin Release

RN – Round

2-1/2" (63 mm) diameter x 7/64" (2.8 mm) flange



Blank Turnknob Coin Release

SR – Square

2-1/2" (65 mm) square x 7/64" (2.8 mm) flange



Blank Turnknob Coin Release

Trim Combinations

RC – Rectangular

1: Coin Release x Turnknob 2: Blank x Blank 3: Cylinder x Turnknob

OL – Oval

1: Coin Release x Turnknob 2: Blank x Blank 3: Cylinder x Turnknob

RN – Round

1: Coin Release x Turnknob 2: Blank x Blank

SR – Square

1: Coin Release x Turnknob 2: Blank x Blank

SL6 Function Chart

Function Code Number	SL6-1	SL6-2	SL6-3	SL6-4	SL6-5	SL6-6
Illustration Outside Door Inside						
Function	Privacy	Passage With edge pull	Passage With edge pull and integrated strike	Passage No edge pull	Bolt only	Entry
Trim Combination	1	2	2	2	1 or 3	3