
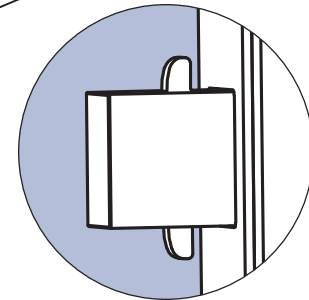


# Mortise Dead Lock

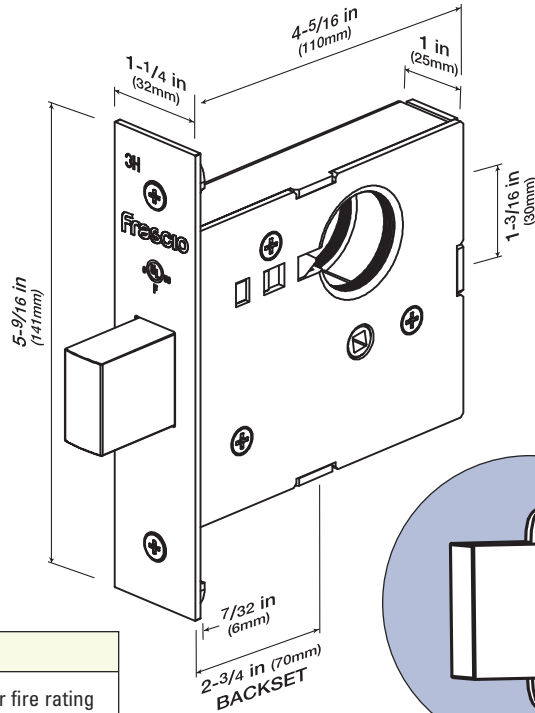

Expanding deadbolt feature of the SL2 sliding door lock

## Specifications:

**Certifications:** ANSI A156.5, Grade 1, UL Listed for 3-Hour fire rating  
**Door Thickness:** 1-3/4" to 2-1/2", thick door configurations available  
**Deadbolt:** 1" (25mm) Projection, stainless steel  
**Backset:** 2-3/4" (70mm)

Function Code	Lockcase Function	Illustration Inside ◀ ▶ Outside	Operation
MD1	CYLINDER x THUMBTURN		Deadbolt thrown or retracted by key outside or thumbturn inside.
MD2	CLASSROOM		Deadbolt thrown or retracted by key from outside. Inside thumbturn cylinder retracts deadbolt but cannot project it.
MD3	DOUBLE CYLINDER		Deadbolt operated by key from either side.
MD4	DOOR BOLT		Deadbolt thrown or retracted by thumbturn from one side. No trim on other side. (Available with emergency key grommet)
MD5	CYLINDER LOCK		Deadbolt thrown or retracted by key from one side. No trim on other side.
SL2	SLIDING DOOR LOCK		Expanding deadbolt thrown or retracted by sliding door trim.