

T600 Series Tubular Latchsets

Beautiful world class designs and proven performance, ideal for your residential or hospitality project.

A valued brand of



www.FRInternational.com

T600 Tubular Latchset


for 2-1/8" Bored-Hole Application




Frascio's T600 latchset is designed for maximum reliability, use with standard door prep, and easy time-saving installation — a proven favorite of designers everywhere.

A beautiful lever trim set needs a mechanical system that allows it to perform flawlessly for years. Frascio's T600 tubular lever sets deliver outstanding performance every time due to its unique heavy duty interlocking backplate system.

Superior features and benefits of our T600 interlocking backplate

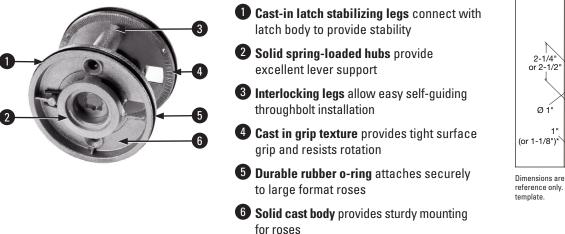



Dimensions are approximate and for reference only. Please refer to Frascio template.

£

T600 Specifications					
Application	Residential and hospitality interior doors requiring passage, privacy, communicating, and dummy trim functions				
Material	Brass, stainless steel, and die cast zinc levers and roses. Latch faceplates and strikes stainless steel				
Backset	2-3/8" (60mm) and 2-3/4" (70mm)				
Handing	Non-handed trim set. Latchbolt handing and bevel is field reversible				
Door Thickness Range	1-3/8" (35mm) to 2" (51mm); thick door parts kit available				
Door Preparation	2-1/8" Bored Hole — refer to door prep template for specifics. ANSI 160 or ANSI 161				
Faceplate	1" x 2-1/4" square corner standard; 1-1/8" wide option available				
Strike	1-1/8" x 2-3/4" T Strike with 1-1/8" lip standard; Full Lip Strike, 1/4" Radius Full Lip Strike and ASA Strike options available				

T600 Series Rose Options — Fully interchangeable within the T600 Series



1903 Contemporary Rose 65 mm (2-9/16")



1905 Traditional Rose 63 mm (2-1/2")



1912 Smooth Rose 63 mm (2-1/2")

1912-76 Smooth Retrofit Rose 76 mm (3") Larger size to cover previous oversized door preps



19120 Square Rose 65 mm (2-9/16")

T600 Function Chart

Function Code Number	Illustration Outside ∢ ► Inside	Function/Description	ANSI Number		
PA		Passage Latchbolt retracted by lever from either side at all times			
PY		Privacy Latchbolt retracted by lever from either side, unless outside is locked by inside pushbutton. Turning inside lever or closing door unlocks outside lever. To unlock from outside, insert emergency tool into privacy access hole in rose.	F76A		
CPABP		Communicating Passage for Blind Prep (no plate) Latchbolt retracted by inside lever. No trim or cover plate on outside.	F111		
CPACP		Communicating Passage with Cover Plate Latchbolt retracted by inside lever. Blank cover plate on outside.	F111		
SD		Single Dummy Surface mounted			
(SD-TB)		Single Dummy Through bolt mounted to back side			
FD		Full Dummy Surface mounted			
(FD-TB)		Full Dummy Through bolt mounted			


T600 tubular leverset ordering example:

Sweep lever on a 1912Q standard square rose, passage function, in polished chrome finish, 2-3/4" backset

720	19120	PA	625	2-3/4	1SC	TSTK1	
Lever design	Rose/Plate	Function	Finish	Backset	Latch	Strike	Misc.
Sweep 720	1912 (65 mm) 1903 (65 mm) 1905 (65 mm) 19120 (65 mm) 1912-76 (76 mm)	PA (Passage) PY (Privacy) FD (Full Dummy) SD (Single Dummy)	Per project specification	2-3/8" 2-3/4"	1SC Standard Commercial Latch (L701)	TSTK1 Standard T-Strike	


Latch and Strike Options

Frascio offers a variety of tubular latch and strike options, available for use on both the T600 Series standard bore and T700 Series small bore latchsets.



Standard Frascio passage and privacy spring latches

- Durable cast latch housing
- Solid brass latch bolt
- Non-handed
- Exceed cycle test requirements for Grade 2 certification
- Available in 2-3/8" (60mm) and 2-3/4" (70mm) backsets

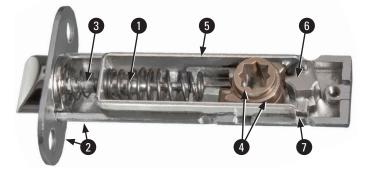

- **Heavy-duty springs** provide robust strength and prevent lever sag
- 2 1-piece cast latch case and mounting flange provides superior strength, stability, and durability
- 3 Stainless steel plunger shoulder rod cannot come disengaged from retractor
- 4 Separate stainless steel lever hubs allows independent operation of interior and exterior sides
- **5** Stainless steel retractor ensures smooth, reliable operation
- 6 Stainless steel cam follower creates positive stop for retractor and hubs
- Integrated interlocking design casting design connects with Frascio Interlocking Backplate to provide exceptional stability and resistance to operating torque

L601 Passage Latch (L601 2-3/8"; L701 2-3/4")



L602 Privacy Latch (L602 2-3/8"; L702 2-3/4")



Also available: **UL701 UL-Rated Latch** (2-3/4'')



a residential-grade tubular that meets performance needs for most residential applications.


Strike options



2-3/4 in




H 1-1/8 in



TSTK2

*Latches are automatically provided with TSTK1 T-strike and strike box, unless otherwise specified.

TSTK3 Full Lip, 1/4" Radius **ANSI Prep Strike**



TSTK4 Full Lip Square Corner Strike



2-1/4

FR International also offers latch (not shown here)

Levers

Choose from hundreds of high-end decorative lever designs engineered using the highest quality materials and crafted with careful attention to detail.

Many more designs are available in our product catalog at www.FRInternational.com.



146 Star

110 Apollo



250 Butterfly



290 Kube



401 Soft Plus



630 Eidos




660 Inlay



745 Modulo L

Frascio

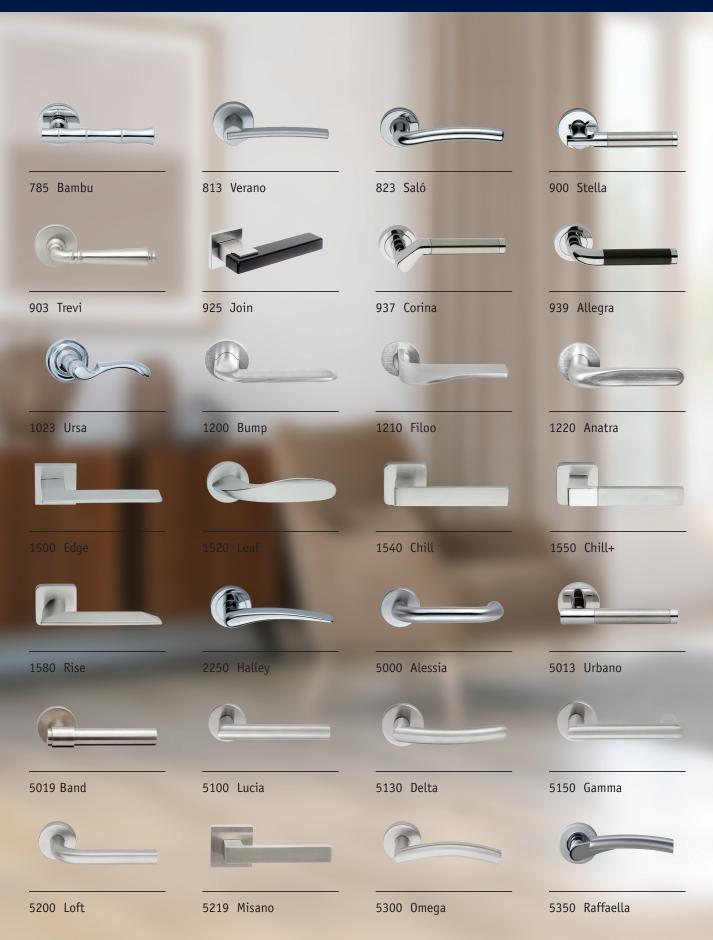

5650 Gabriella	5700 Loredana	5702 Stefano
0		
5752 Ellise	5800 Antonella	5804 Maretto
C		
5820 Forino	5850 Christina	5855 Sophia
<u>e</u>		
6202 Decora	6208 Esago	6210 Base
6218 Simpla		6280 Vienna
6		
6592 Cutlass	6594 Modulo B	6605 Textura
6774 Scala	6716 Arno	View more lever designs in our product catalog at www.FRInternational.com
	5752 Ellise 5752 Ellise 5820 Forino 6202 Decora 6218 Simpla	Image: state of the state of

Frascio

Proudly Celebrating 75 years of Innovative Hardware Design





FR International, LLC 1011 3rd Avenue S.W. Carmel, Indiana USA 46032 Tel: (317) 663-0030 Fax: (317) 663-0029 Toll Free: 1-800-238-9711 **www.FRInternational.com**